

## UNIVERSAL ANGLE UTILITY RACK MODEL 207-UA-13A

### FEATURES AND BENEFITS:

- Durable utility rack for transport and storage of products on a large variety of pan sizes.
- Fully welded framework of structural aluminum extrusions for rigidity and durability.
- Constructed of non-corrosive, Hi-Tensile aluminum for strength.
- Chrome plated wire universal angles adjustable on 1-1/2" centers. Thirteen sets of angles provided, twelve are adjustable.
- Heavy duty 5" swivel casters, two with brakes. Provides mobility when fully loaded.



207-UA-13A  
(Pans not included)




### ACCESSORIES and OPTIONS (Available at extra cost):

- Extra Universal Angles
- Pan Stop
- Corner Bumpers
- Vertical Bumpers
- Perimeter Bumper

See page G-36 for accessory details.



# 207-UA-13A

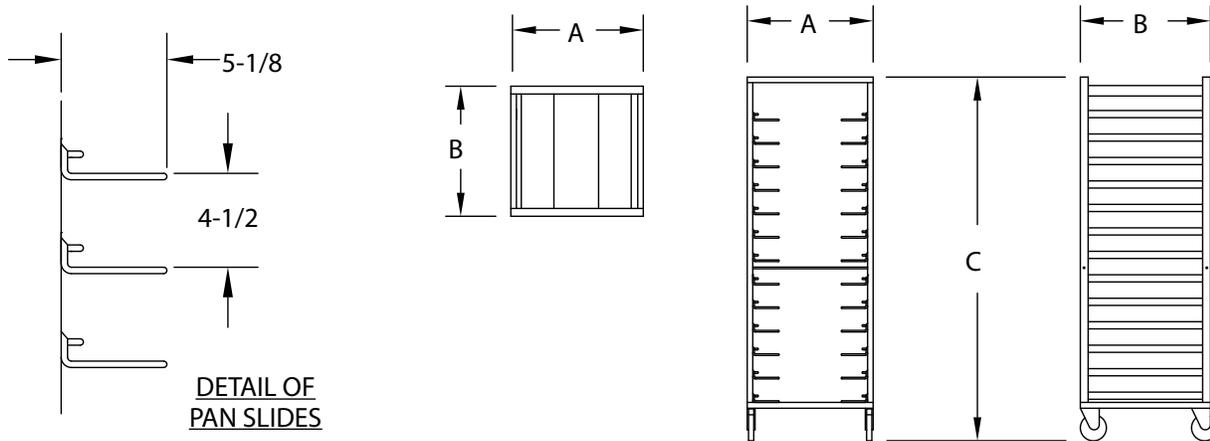

| CRES COR MODEL NO. | PAN         |                |    | DIM "A" | DIM "B"  | DIM "C" | INSIDE DIMENSIONS |        |        |     | WEIGHT ACT. |
|--------------------|-------------|----------------|----|---------|----------|---------|-------------------|--------|--------|-----|-------------|
|                    | CAP/ ANGLES | SIZE           |    | WIDTH   | DEPTH    | HEIGHT  | WIDTH             | DEPTH  | HEIGHT |     |             |
| 207-UA-13A         | 13 SETS     | SEE NOTE BELOW | IN | 25-3/8  | 24-15/16 | 69-3/4  | 21-3/4            | 24-3/8 | 61-1/2 | LBS | 68          |
|                    |             |                | MM | 645     | 635      | 1775    | 555               | 620    | 1565   | KG  | 31          |

NOTES: 1. Pan sizes 22" x 20" (560 x 510) Roast & Bake Pans, 10" x 20" (255 x 510) Roast & Bake Pans, 18" x 26" (460 x 660) Bun Pans, 14" x 18" (355 x 460) Service Trays, 12" x 20" (305 x 510) Steam Table Pans. Refer to Pan Size Chart at end of section.  
 2. When ordering bumpers, add 2" to overall dimensions.

ALL ALUMINUM CONSTRUCTION IS WELDED AND FINISHED.



Gold indicates our Best Rack with the best warranty in the industry. 3-Year Parts / 1-Year Labor with lifetime guarantee against rust & corrosion

### RACK:

- Posts: Extruded channels, 1-1/16 x 2 x .125.
- Top and bottom: Extruded channels, 1-1/16 x 2-3/8 x .188; welded to posts.
- Tie rods (2): 5/16 dia. steel rods enclosed in aluminum tubing; fastened to posts.
- Casters: 5" dia., swivel, modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -4°/+140°F. Delrin bearings. Two casters equipped with brakes.

### PAN SLIDES:

- Wire angles (.306 dia.), nickel chrome plated steel, spaced on 4-1/2" centers, adjustable on 1-1/2" centers.
- Bottom extruded angle, welded to posts.

### SHORT FORM SPECIFICATIONS

Cres Cor Utility Rack Model 207-UA-13A. Extruded aluminum welded construction. Tie rods (2) applied at front and rear. (13) sets wire universal angles for multiple pan sizes, adjustable spacing every 1-1/2". 5" swivel modulus casters, Delrin bearings. Load capacity 250 lbs. each, temperature -4° to +140°F. 3-Year Parts / 1-Year Labor warranty. Lifetime guarantee against rust & corrosion. Provide the following accessories: \_\_\_\_\_ . NSF listed.



5925 Heisley Road • Mentor, OH 44060-1833  
 Phone: 877/CRESCOR • Fax: 440/350-7267  
 www.crescor.com  
 © Crescent Metal Products, Inc. 2017 All rights reserved.

*In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.*

Made in America Since 1936