

## EXTRUDED SIDEWALL PAN DRYING RACK MODEL 252-DR-36

### FEATURES AND BENEFITS:

- Durable pan drying rack for drying and transport of (36) 18" x 26" pans.
- Fully welded framework of structural aluminum extrusions for rigidity and durability.
- Constructed of non-corrosive, Hi-Tensile aluminum for strength.
- Easy to clean; interlocking, extruded sidewalls hold pans on 1-1/2" centers. Provides added strength.
- Offers complete flexibility for operator's selection of pan spacing.
- Supplied with three raised wire grids.
- Heavy duty 5" swivel casters, two with brakes. Provides mobility when fully loaded.

**Note:** Designed to hold standard 18 x 26" pans by the lip. Due to the variability of pan manufacturers/quality of pans being held/pan sizes, please contact manufacturer or provide a sample pan to ensure a proper fit.




252-DR-36



### ACCESSORIES and OPTIONS (Available at extra cost):

- Pan Stop
- Corner Bumpers
- Vertical Bumpers
- Perimeter Bumper
- Rotary Bumpers (for use with 5" casters)
- Floor Lock (for use with 5" casters)
- Various Caster Options

See page G-36 for accessory details.

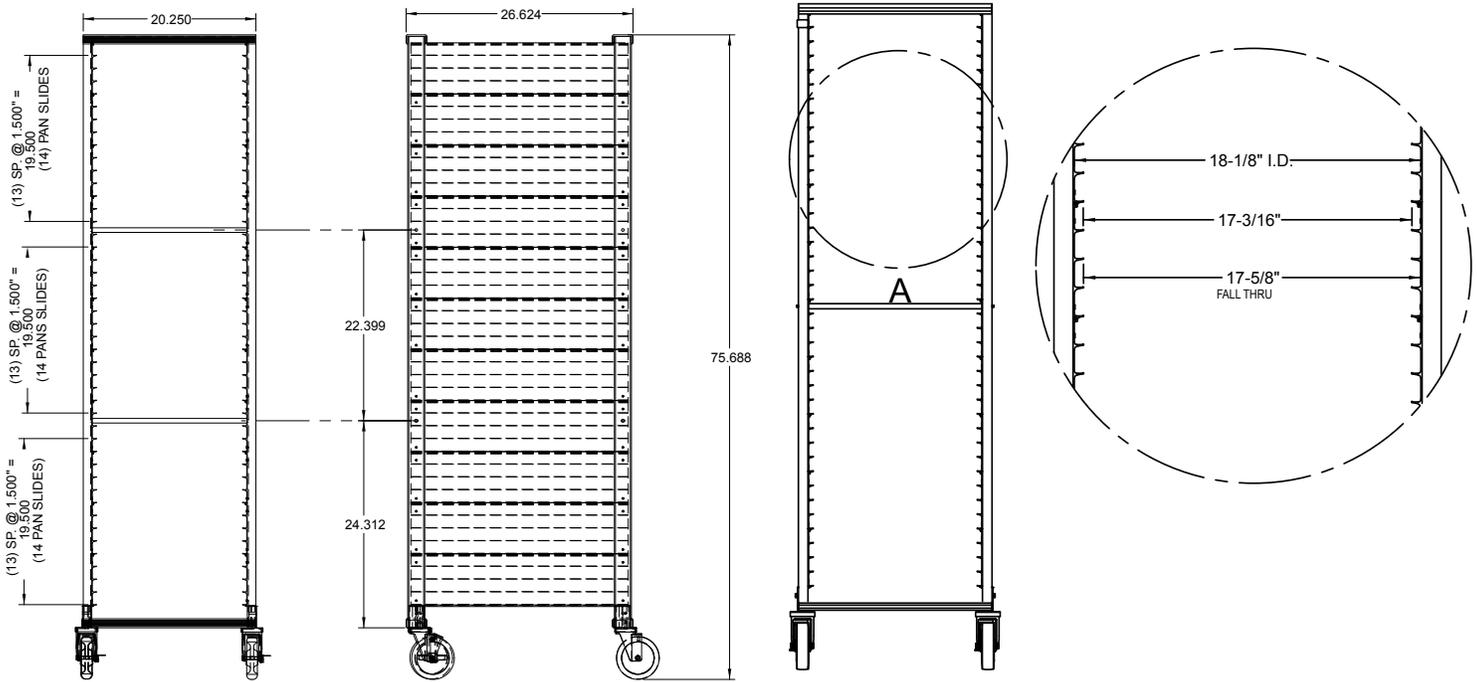

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS			WEIGHT ACT.	
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
252-DR-36	36	18 X 26	IN	21-5/16	26-5/8	75-11/16	18-1/8	26	67-1/2	LBS	70
		460 X 660	MM	560	680	1922	460	660	1715	KG	32

When ordering bumpers, add 2" to overall dimensions.

ALL ALUMINUM CONSTRUCTION IS RIVETED, WELDED AND FINISHED.

**RACK:**

- Posts: Extruded channels, 1 x 2 x .125.
- Top and bottom: Extruded channels, 1-1/16 x 2-3/8 x .188; welded to posts.
- Tie rods (4): Two front and back; 5/16 dia. steel rods enclosed in aluminum tubing, fastened to posts.
- Sides: Interlocking extruded 6" panels, smooth outer sides; riveted to posts.
- Casters: 5" dia., swivel, modulus tires, 1-1/4 wide, load cap. 250 lbs., temp. range: -45°\+180°F. Delrin bearings.
- Two casters equipped with brakes.

**Note:** Designed to hold standard 18 x 26" pans by the lip. Due to the variability of pan manufacturers/quality of pans being held/pan sizes, please contact manufacturer or provide a sample pan to ensure a proper fit.

**PAN SLIDES:**

- Eleven 6" extruded interlocking side wall panels act as pan slides on 1-1/2" centers.
- Holds (36) 18" x 26" bun pans vertically.
- Grids (3): Nickel chrome plated steel, raised wire 17" x 25".



Scan QR code to view Spec Sheet, Operating Manual, Wiring Diagram or to call Customer Service.

If you need a QR reader visit your App Store on your Smartphone or Tablet.



5925 Heisley Road • Mentor, OH 44060-1833  
 Phone: 877/CRESCOR • Fax: 440/350-7267  
 www.crescor.com

© Crescent Metal Products, Inc. 2017 All rights reserved.

**SHORT FORM SPECIFICATIONS**

Cres Cor Pan Drying Rack Model 252-DR-36. Extruded aluminum welded construction. Tie rods (2) applied at front and rear. Interlocking extruded sides for drying (36) 18" x 26" pans. 5" swivel modulus casters, Delrin bearings. Load capacity 250 lbs. each, temperature -45° to +180°F. 2-Year Parts / 1-Year Labor warranty. Provide the following accessories: \_\_\_\_\_ . NSF listed.

*In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.*

Made in America Since 1936