

INSTALLATION INSTRUCTIONS

for 0519-087-K Hinge Kit

for Models H137B and H138B Series Hot Cabinets

PARTS INCLUDED IN KIT:

<u>QTY</u>	<u>PART</u>
2	Hinges
2	Adjustment Plates
2	Hinge Covers
1	Shim
12	Screws

Door Adjustment and Alignment:

1. Unlatch, open and remove doors by lifting each door straight up.
2. Loosen hinges indicated in Figure 1.
3. Apply liquid thread lock to each screw of the hinges.
4. Push hinge toward the middle of the cabinet and tighten screws. (Figure 1)
5. Check the other hinges for loose screws and use liquid thread lock and tighten if necessary.
6. Install doors.
7. If door is still out of adjustment, add shim to bottom hinge on each door. (Figure 2)

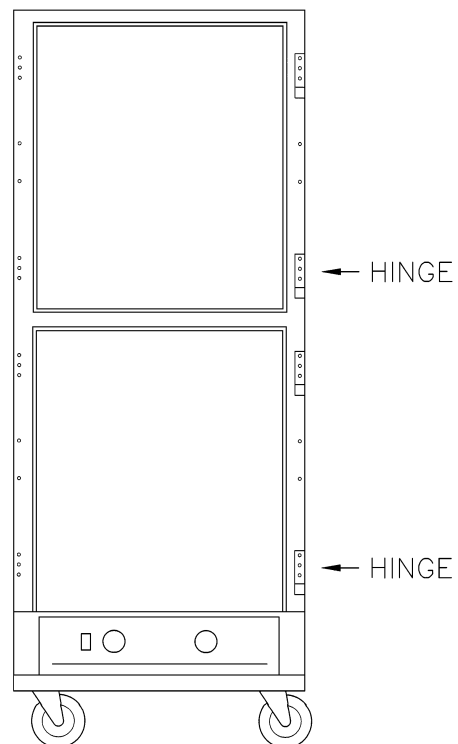


Figure 1

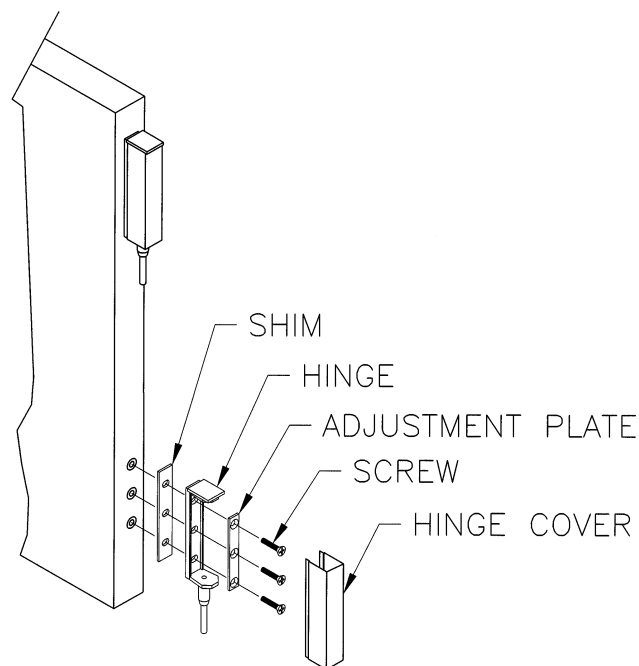


Figure 2