

## SUPER DUTY CHILLTEMP® REFRIGERATED CABINET MODEL R-171-SUA-10E-SD

### FEATURES AND BENEFITS:

- Super duty composite side impact panel protection with ergonomic grips on both sides prevents damage to walls; allows for easy maneuvering.
- Fully insulated mobile ChillTemp® refrigerated cabinet for holding food and beverages at serving temperature.
- Lockable slide bolt door latches ensure the doors stay closed even during the roughest transport.
- Forced air system provides even distribution of cold air; cabinet maintains temperatures from 33°F (.5° C) to 40°F (4.5° C). Automatically defrosts.
- Hi efficiency compressor with automatic overload reset. Uses low GWP, environmentally-friendly refrigerant blend R513a, compatible with California regulations and available for sale in state.\*
- Full perimeter bumper, rear push/pull handle and dry erase panel come standard on all models.
- Stainless steel construction throughout for ease of cleaning. One piece extended base protects cabinet body.
- Self-closing insulated door prevents temperature loss. Magnetic door gaskets for proper seal.
- Insulated door prevents temperature loss. Standard with right hand hinging; left hand hinging available upon request. Perimeter door heater to prevent condensation.
- Interior LED light for improved visibility.
- Generous 18-cubic foot interior.
- Ten sets of chrome plated wire angles accommodate a large variety of pan sizes on adjustable 1-1/2" centers.
- Heavy duty 6" modulus casters, two with brakes. Provides mobility when fully loaded.




R-171-SUA-10E-SD

### ACCESSORIES and OPTIONS (Available at extra cost):




- Menu Card Holder
  - Corner Bumpers
  - Polyurethane Casters
  - 240 Volt Service
  - Interior for (28) 18" x 26" pans
- See page K-4 for accessory details.

\* Products manufactured after 8/1/2019 use R513a, products manufactured before 8/1/2019 use R134a

# R-171-SUA-10E-SD



DETAIL OF PAN SLIDE

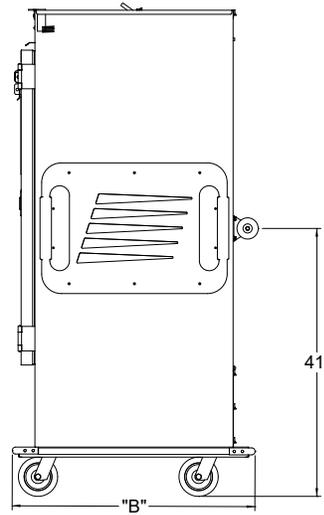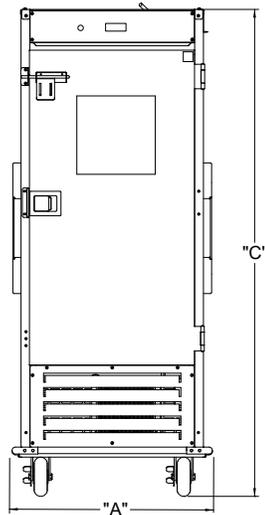

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT ACT.
	CAP/ ANGLES	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
R-171-SUA-10E-SD	10 SETS	18 X 26	IN	30-7/16	40-1/2	77-1/4	23-1/2	29-3/4	47-3/8	LBS	408
			MM	773	1029	1959	597	755	1203	KG	186
	20 SETS	12 X 20	IN								
			MM								

**CABINET:**

- Body: 22 ga. stainless steel.
- Reinforcement: Internal framework of 18 ga. 304 stainless steel.
- Insulation: Foam in Place
- Push/pull handle: Welded stainless steel with end bumpers; rear mounted.
- Interior coved corners.
- Super Duty composite side impact panel with ergonomic grips.
- Supplied with magnetic white erasable board, 12" x 12".

**BASE:**

- One piece construction, .125 aluminum; extended in rear for toe kick.
- Casters: 6" dia., modulus tires, 2" wide, load cap. 450 lbs. each, temp. range -40°/+180°F. Sealed ball bearings; permanently lubricated. Front casters equipped with brakes.
- Perimeter bumper: 1" non-marking gray rubber.

**DOOR:**

- Formed 22 ga. stainless steel.
- Hinges: 11 ga. stainless steel, butt type.
- Gasket: Perimeter type, silicone.
- Latch: Polished stainless steel, slam type; flush mounted.
- Transport Latch: 12 ga. stainless steel slide with lockable hasp.

**PAN SLIDES:**

- Wire angles (.306 dia.), nickel chrome plated steel, mounted on lift-off posts.
- Spaced on 4-1/2" centers; adjustable on 1-1/2" centers.

**ELECTRICAL COMPONENTS:**

- Thermostat: Pre-set to 38° F (3.3° C)
- Lighted Power Switch
- Power cord: Permanent, 10 ft., 14/3 ga. with molded plug
- Compressor: High Efficiency
- Condensate evaporator: Electrical
- R513a refrigerant (after 8/1/2019); R134a refrigerant (before 8/1/2019).
- Vent Fan
- Perimeter Door Heater
- Interior Compartment Light

**POWER REQUIREMENTS:**

- 120 Volts, 60 Hz., single phase, 15 Amp. service.

**SHORT FORM SPECIFICATIONS**

Cres Cor Refrigerated Cabinet Model R-171-SUA-10E-SD. Cabinet 22 ga. stainless steel; stainless steel internal frame. (10) sets of wire universal angles for multiple pan sizes, adjustable spacing every 1-1/2". Door, 22 ga. stainless steel. Foam insulation in sides and doors. Interior coved corners. 1/3 h.p. compressor, 120 Volts. One piece base, .125 aluminum. 6" swivel casters, ball bearings. Load capacity 450 lbs. each. 2-Year Parts / 1-Year Labor warranty. Provide the following accessories: \_\_\_\_\_ . CSA-US/C, CSA to NSF7 listed.



5925 Heisley Road • Mentor, OH 44060-1833  
 Phone: 877/CRESCOR • Fax: 440/350-7267  
 www.crescor.com

© Crescent Metal Products, Inc. 2019 All rights reserved.

*In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.*

Made in America Since 1936