

INSULATED STAINLESS STEEL RADIANT HOT CABINET MODEL 500HH1EX

FEATURES AND BENEFITS:

- Fully insulated cabinets keep prepared foods at serving temperatures.
- Powerful, yet efficient, 900 Watt heating system maintains the right temperature to properly hold products. Heats up to 200°F. (93°C.).
- User-friendly solid-state control with large, high-resolution touchscreen display to ensure holding at precise food temperature.
 - 6.8", high-resolution, glove-safe, high-impact, capacitive touchscreen interface.
 - Large, easy-to-read time/temperature displays.
 - Shelf timers.
 - HACCP data collection with date/time stamp.
- Internal frame in body maintains structural rigidity.
- Safety-conscious anti-microbial latches protect against spreading germs.
- Stainless steel construction throughout for ease of cleaning.
- Insulated field reversible doors for flexibility. Standard with right hand hinging; left hand hinging available upon request.
- Magnetic latches for "easy open"; twist-lock catch secures doors during transport. Latches and hinges mounted inboard.
- Wire pan supports are removable for easy cleaning and hold 12" x 20" pans on 1-3/8" centers.
- Heavy duty 2-1/2" swivel casters, two with brakes, that provide mobility when fully loaded.



500HH1EX




Deluxe Touchscreen Control

- HACCP data collection with date/time stamp
- Shelf timers • Programmable recipes
- One-Touch button recipes

ACCESSORIES and OPTIONS (Available at extra cost):

- ☐ Key Lock Handles
- ☐ Corner Bumpers
- ☐ Perimeter Bumper
- ☐ Door Window
- ☐ Various Caster Options
- ☐ 240 Volt Service
- ☐ Various Interior Rack Options

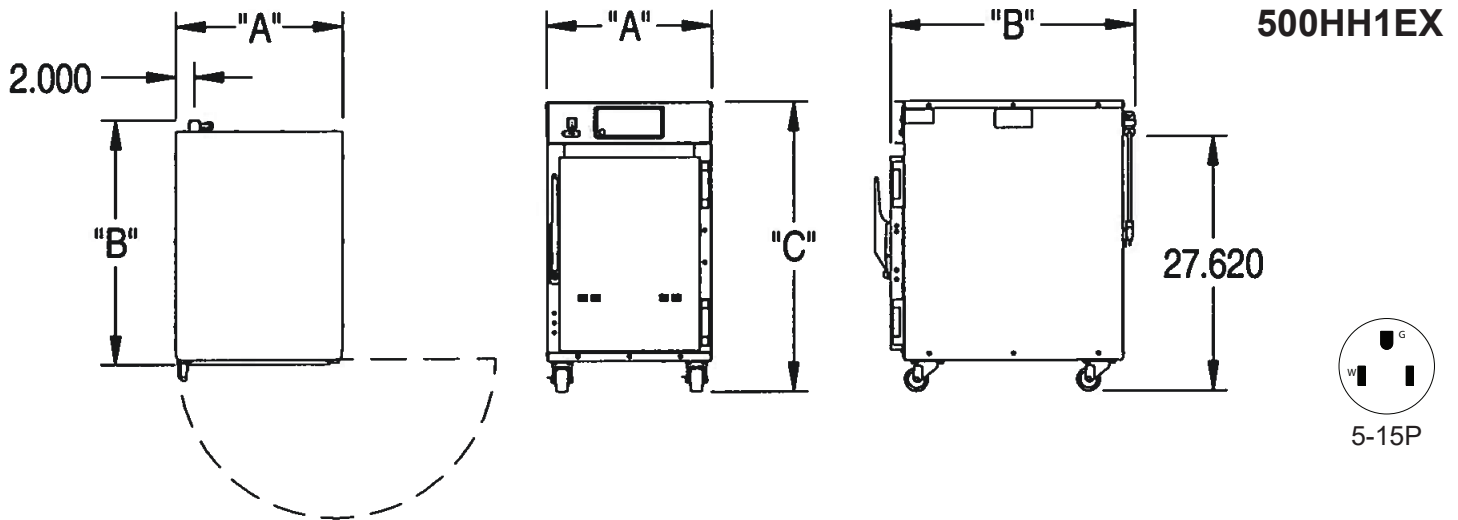

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT ACT.
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
500HH1EX	5	12 x 20 x 2-1/2	IN	18-1/8	26-9/16	31-1/2	13-1/2	21-1/2	20	LBS	110
		305 x 510 x 65	MM	460	675	800	344	546	508	KG	50
	3	12 x 20 x 4	IN								
		305 x 510 x 105	MM								

When ordering bumpers, add 3-11/16 to DIM "A", 2-7/8 to DIM "B".

CABINETS:

- Bodies: 22 ga. outer and 20 ga. inner stainless steel compartments.
- Reinforcements: Internal framework of channels, 1 x 3/4 x .125.
- Insulation: Fiberglass, thermal conductivity (K factor) is .23 BTU/ft HR °F (.04 w/mK) at 75°F. 1-1/2" in top, bottom and walls, 1" in doors.

BASE:

- One piece construction, .060 stainless steel.
- Casters: 2-1/2" dia. swivel, 1-1/4" wide, load cap. 150 lbs. each, temp. range -45°/+180°F. Front casters equipped with brakes.

DOORS:

- Field reversible.
- Formed 22 ga. stainless steel.
- Latches: Chrome plated zinc with composite handle, magnetic type; mounted inboard.
- Transport knob.
- Hinges: Heavy duty chrome plated zinc; mounted inboard.
- Gaskets: Perimeter type, silicone.
- Vents: Adjustable.

PAN SLIDES:

- Wire rack with .312 dia. wire vertically and .250 dia. wire horizontally. Nickel chrome plated steel spaced on 1-3/8" centers.

HOT UNIT COMPONENTS:

- Temperature Control:
 - 6.8" high-resolution, glove-safe, high impact, capacitive touchscreen interface.
 - Programmable recipes.
 - One-Touch button recipes.
 - Shelf timers.
 - HACCP data collection with date/time stamp.
 - Temperature range: Room ambient to 200°F (93°C).
- USB port with cover.
- Switch: ON-OFF rocker type.
- Solid-state relay.
- Power cord: Permanent, 6ft., 14/3 ga., with straight plug.
- Heaters (3): 300 Watts each.

POWER REQUIREMENTS:

- 900 Watts, 120 Volts, 60 Hz., single phase, 7.5 Amps., 15 Amp. service.

SHORT FORM SPECIFICATIONS

Cres Cor Insulated Hot Stainless Steel Cabinet Model 500HH1EX. Outer liner of 22 ga., stainless steel, inner liner of 20 ga. stainless steel, reinforced with channel frame. 1-1/2" Fiberglass insulation in walls, top and bottom; 1" in door. Welded and finished. (3) 300 Watt inner wall heaters, 120 volts. Removable pan supports for 12" x 20" pans spaced on 1-3/8" centers. 2-1/2" swivel casters. Load capacity 150 lbs. each. 2-Year Parts / 1-Year Labor warranty. Provide the following accessories: _____ CSA-US, CSA-C, CSA to NSF4 listed.



5925 Heisley Road • Mentor, OH 44060-1833
Phone: 877/CRESCOR • Fax: 440/350-7267
www.crescor.com

© Crescent Metal Products, Inc. 2024 All rights reserved.

In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.

Made in America Since 1936