

## INSULATED MOBILE SERVING CART – Heated or Ambient MODEL H339264AC

### FEATURES AND BENEFITS:

- Fully insulated counter mobile serving cabinet keeps prepared foods at serving temperatures. Ideal for constructing, holding and serving meal trays.
- Consists of (1) heated and (1) non-heated compartment. Two heated wells on top keep meals hot and easily accessible.
- Powerful, yet efficient, 1500 Watt heating system maintains the right temperature to properly hold products. Heats up to 200°F (93°C).
- Internal frames in body and doors maintain structural rigidity.
- Insulated doors with flexibility. Self-closing hinges stay open past 90°.
- Pan slides securely hold (16) 12" x 20" pans on 2-3/4" centers; removable for easy cleaning.
- Push/pull handle with bumpers helps with maneuverability.
- Designed with 5" diameter swivel casters, front casters equipped with brakes.



H339264AC






### ACCESSORIES and OPTIONS

(Available at extra cost):

- ☐ 240 Volt Service

# H339264AC

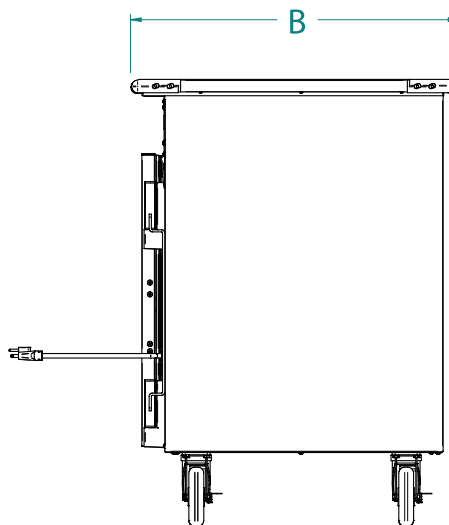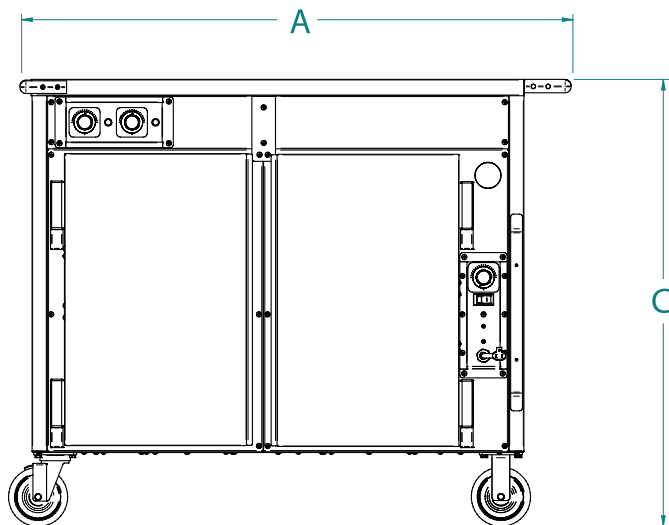

CRES COR MODEL NO.	PAN			DIM "A"	DIM "B"	DIM "C"	INSIDE DIMENSIONS				WEIGHT ACT.
	CAP	SIZE		WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	HEIGHT		
H339264AC	16	12 x 20	IN	46-1/2	27-3/8	37-3/4	13-7/8	21-1/4	20-1/4	LBS	225
		305 x 510	MM	1181	696	959	352	552	514	KG	102

## CART:

- Consists of (1) heated and (1) non-heated compartment with removable pan slides of formed 304 stainless steel angles, 5/8" x 3/4" x 18 ga. Mounted on formed stainless steel 18 ga channel, spaced on 2-3/4" centers.
- Top: Formed 18 ga. 304-3 stainless steel.
- Body: 18 ga 304-3 stainless steel.
- Insulation (Walls, doors, base): 1" Fiberglass, thermal conductivity (K factor) is .23 at 75°F.
- Two heated wells: 12" x 20" x 4".
- Push/pull handle (1): Welded construction with corner bumpers; Welded to cabinet.

## CASTERS:

- 5" dia., swivel, modulus tires, 1-1/4 wide, load cap. 250 lbs. each, temp. range -45°/+180°F. Delrin bearings. Front casters equipped with brakes.

## DOORS:

- Exterior: .063 aluminum
- Hinges: Heavy duty chrome plated steel; lift-off type; self-closing, stays open past 90°.



Scan QR code to view Spec Sheet, Operating Manual, Wiring Diagram or to call Cres Cor® Customer Service.

If you need a QR reader, visit your App Store on your Smartphone or Tablet.

## ELECTRICAL COMPONENTS:

- Power cord: Permanent, 10 ft., 14/3 ga.
- Thermostats: (3) electro-mechanical, room ambient to 220°F
- Switch: On-Off rocker type.
- Heater: (3) 150 Watt heater in hot cabinet. (1) 500 Watt heater under each well.

## POWER REQUIREMENTS:

- 1500 Watts, 120 Volts, 60 Hz., single phase, 12 Amps., 15 Amp. service.

## SHORT FORM SPECIFICATIONS

Cres Cor Insulated Mobile Serving/Tray Make-Up Cabinet Model H339264AC. (2) Compartment, (1) Heated, (1) Non-heated. 1" Fiberglass insulation in walls, doors, and bottom. (3) 150 Watt and (2) 500 Watt heaters, 120 Volts, adjustable heat. Removable pan supports for (16) 12 x 20" pans. (2) 5" swivel and (2) 5" rigid modulus casters, Delrin bearings. Load capacity 250 lbs. each.



5925 Heisley Road • Mentor, OH 44060-1833  
Phone: 877/CRESCOR • Fax: 440/350-7267  
www.crescor.com

© Crescent Metal Products, Inc. 2025 All rights reserved.

*In line with its policy to continually improve its products, CRES COR reserves the right to change materials and specifications without notice.*

Made in America Since 1936